


BFO




ROUND-HEAD SCREW AND REINFORCED SHANK

- Countersunk teardrop shaped head with curved surface for a pleasant look and firm grip with the bit
- The increased shank diameter with high torsional strength for a strong, safe screwing even in high density woods
- In A2 | AISI305 stainless steel, it is suitable for service classes 1-2-3
- It can be used without pre-drill, in woods having a maximum density of 550 kg/m³

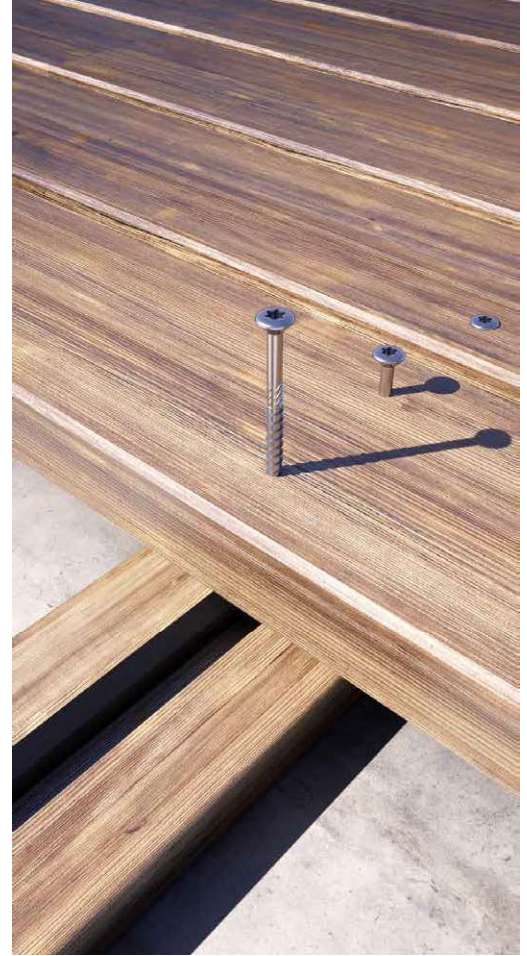

A maximum fastening thickness



Data sheet available online



d ₁ [mm] [in]	d _k [mm] [in]	CODE	L		b		A		pcs
			[mm]	[in]	[mm]	[in]	[mm]	[in]	
5 0.20 TX 25	8,00 0.315	BFO550	50	1 15/16	30	1 3/16	20	13/16	200
		BFO560	60	2 3/8	36	1 7/16	24	15/16	200
		BFO570	70	2 3/4	42	1 5/8	28	1 1/8	100

BFO BUCKET



SCREWS IN BUCKET 1000

- Practical version with 1000 pieces per package
- Packaging that guarantees durability even in rainy conditions
- PET plastic box, durable, impact-resistant and reusable



d ₁ [mm] [in]	d _k [mm] [in]	CODE	L		b		A		pcs
			[mm]	[in]	[mm]	[in]	[mm]	[in]	
5 0.20 TX 25	8,00 0.315	BFOBUC550	50	1 15/16	30	1 3/16	20	13/16	1000
		BFOBUC560	60	2 3/8	36	1 7/16	24	15/16	1000

