


DWZ



DOUBLE THREAD SCREW FOR INSULATION LAYER

- Allows continuous, uninterrupted fastening of roof insulation package. Prevents thermal bridges in compliance with energy saving regulations
- Connector for hard, soft and façade insulation, CE certified according to ETA-11/0030
- The cylindrical head is ideal for hidden insertion in the batten.

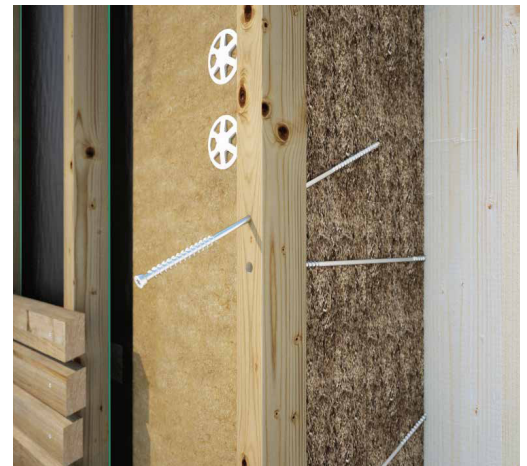

Data sheet available online



| d ₁ [mm] [in] | d _k [mm] [in] | CODE | L | | b | | b ₂ | | pcs |
|-----------------------------|-----------------------------|---------|------|--------|------|------|----------------|-------|-----|
| | | | [mm] | [in] | [mm] | [in] | [mm] | [in] | |
| 7 0.28 TX 30 | 9,50 0.374 | DWZ7220 | 220 | 8 5/8 | 100 | 4 | 60 | 2 3/8 | 50 |
| | | DWZ7260 | 260 | 10 1/4 | 100 | 4 | 60 | 2 3/8 | 50 |
| | | DWZ7300 | 300 | 11 3/4 | 100 | 4 | 60 | 2 3/8 | 50 |
| | | DWZ7340 | 340 | 13 3/8 | 100 | 4 | 60 | 2 3/8 | 50 |
| 9 0.36 TX 40 | 11,50 0.453 | DWZ9320 | 320 | 12 5/8 | 100 | 4 | 60 | 2 3/8 | 50 |
| | | DWZ9360 | 360 | 14 1/4 | 100 | 4 | 60 | 2 3/8 | 50 |
| | | DWZ9400 | 400 | 15 3/4 | 100 | 4 | 60 | 2 3/8 | 50 |
| | | DGZ9440 | 440 | 17 1/4 | 100 | 4 | 60 | 2 3/8 | 50 |

RELATED PRODUCTS



NAIL PLASTER
HIGH-ADHESION
NAIL POINT
SEALANT TAPE
page 189



GEMINI
HIGH-ADHESION
DOUBLE-SIDED NAIL
POINT SEALANT TAPE
page 189



ISULFIX
ANCHOR FOR FASTENING
INSULATION TO
BRICKWORK
page 118